

Spring 2017

## Hand Cranked Generator For Mobile Devices

Kyle Brown

*University of Southern Maine*

Monique Butoto

*University of Southern Maine*

Stephen Cain

*University of Southern Maine*

Steven Corio

*University of Southern Maine*

Brock Stevenson

*University of Southern Maine*

Follow this and additional works at: [https://digitalcommons.usm.maine.edu/thinking\\_matters](https://digitalcommons.usm.maine.edu/thinking_matters)



Part of the [Electronic Devices and Semiconductor Manufacturing Commons](#), and the [Power and Energy Commons](#)

---

### Recommended Citation

Brown, Kyle; Butoto, Monique; Cain, Stephen; Corio, Steven; and Stevenson, Brock, "Hand Cranked Generator For Mobile Devices" (2017). *Thinking Matters Symposium Archive*. 120.

[https://digitalcommons.usm.maine.edu/thinking\\_matters/120](https://digitalcommons.usm.maine.edu/thinking_matters/120)

This Poster Session is brought to you for free and open access by the Student Scholarship at USM Digital Commons. It has been accepted for inclusion in Thinking Matters Symposium Archive by an authorized administrator of USM Digital Commons. For more information, please contact [jessica.c.hovey@maine.edu](mailto:jessica.c.hovey@maine.edu).

## ABSTRACT

It's estimated that over 90% of American adults own cell phones while over 70% of the United States land area belongs to rural counties. It is a challenge to charge mobile devices in these remote and rural areas given the lack of access to power sources. This lack of power in remote destinations limits the general use of mobile devices for outdoor enthusiasts, as well as a survival means for all who need access to a portable power generation device, especially in emergency situations. There are other portable generators currently available on the market, but our project wanted to take a different approach. The design and fabrication of a portable hand powered generator, that is lightweight, small, powerful, durable and easy to operate by anyone is the goal of this project.

## BACKGROUND RESEARCH

A portable device was thought of as the best option, as outdoor enthusiasts will need to be able to carry it around in order to easily charge their devices. For safety purposes, everyone usually leaves their home with their devices fully charged, but as the device gradually discharges, emergency situations may arise where the person needs to make a simple phone call or send a message. This is why we thought of a portable mobile charging device specifically for such situations.

- Who: Outdoor enthusiasts and motorists
- What: A portable way to charging a mobile device
- When: As emergency situations
- Why: To increase the chance of survival
- Where: Remote areas.

## DESIGN REQUIREMENTS

- The final design shall have dimensions no larger than (0.15 m x 0.15 m x 0.15 m).
- The final design shall weigh less the 4.5 Kg.
- The final design shall require a torque less than 5 N-m to crank.
- The final design shall be able to withstand a 1.5 m drop.
- The final design shall have a IP rating of IP24
- The final design shall deliver at least 2.5 watts, 5 volts, 500 mA.

## PROBLEM STATEMENT

It is a challenge to charge mobile devices in remote areas given the lack of power sources. This lack of power in remote destinations limits the use of mobile devices for general use of outdoors enthusiasts as well as for survival means of all.




Fig. 1 - Complete model showing the crank arm folded into the case, and the storage cover in place




Fig. 2 - Front/Side view with storage cover removed




Fig. 3 - Front view with storage cover removed




Fig. 4 - Bottom view with the crank arm extended




Fig. 5 - Back/Side view with crank arm extended




Fig. 6 - Front/Side view with handle extended; wireframe shows the internal motor

## DESIGN DETAILS

- Cylindrical Design
  - Ensures components are safe from impact
  - Less likely for housing to crack when dropped
  - Crank modeled to fold into housing
  - Compact / Easy to carry
  - Will be fully sealed to protect from possible water damage
- Storage Cover
  - Protects the LED & USB port
  - Large enough to store extra utility tools
  - Easily removable by utilizing two slotted pins

## INTERNAL CIRCUIT

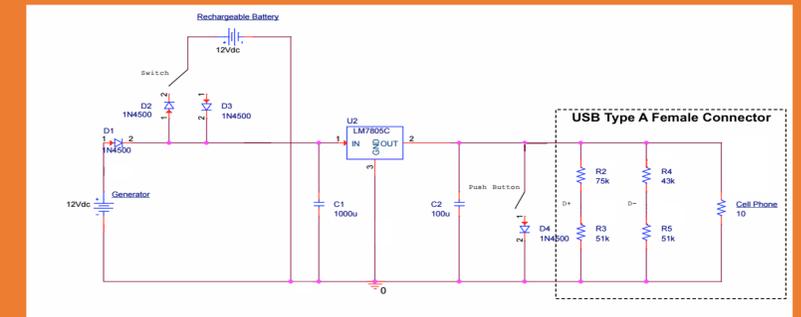


Fig 7: Circuit designed in Cadence Orcad Capture. The cell phone is modeled as a 10  $\Omega$  resistor to simulate a 500mA current draw.

## DROP TEST




Fig 8: 1.5m drop test on crank handle




Fig 9: 1.5m drop test on crank hinge of housing




Fig 10: 1.5m drop test on side of housing




Fig 11: Prototype using circuit from Figure 7



Fig 12: Current and voltage measured for 2.6 W of power



Fig. 13: Tested with tachometer: 360 rpm to deliver 2.5 W of power



Fig 14: Bottom view of 3D Printed Design



Fig 15: Side View of 3D printed model



Fig 16: Side view with handle extended of 3D printed model